




**Fiber**wood<sup>®</sup>

French Cladding

EXOTICS

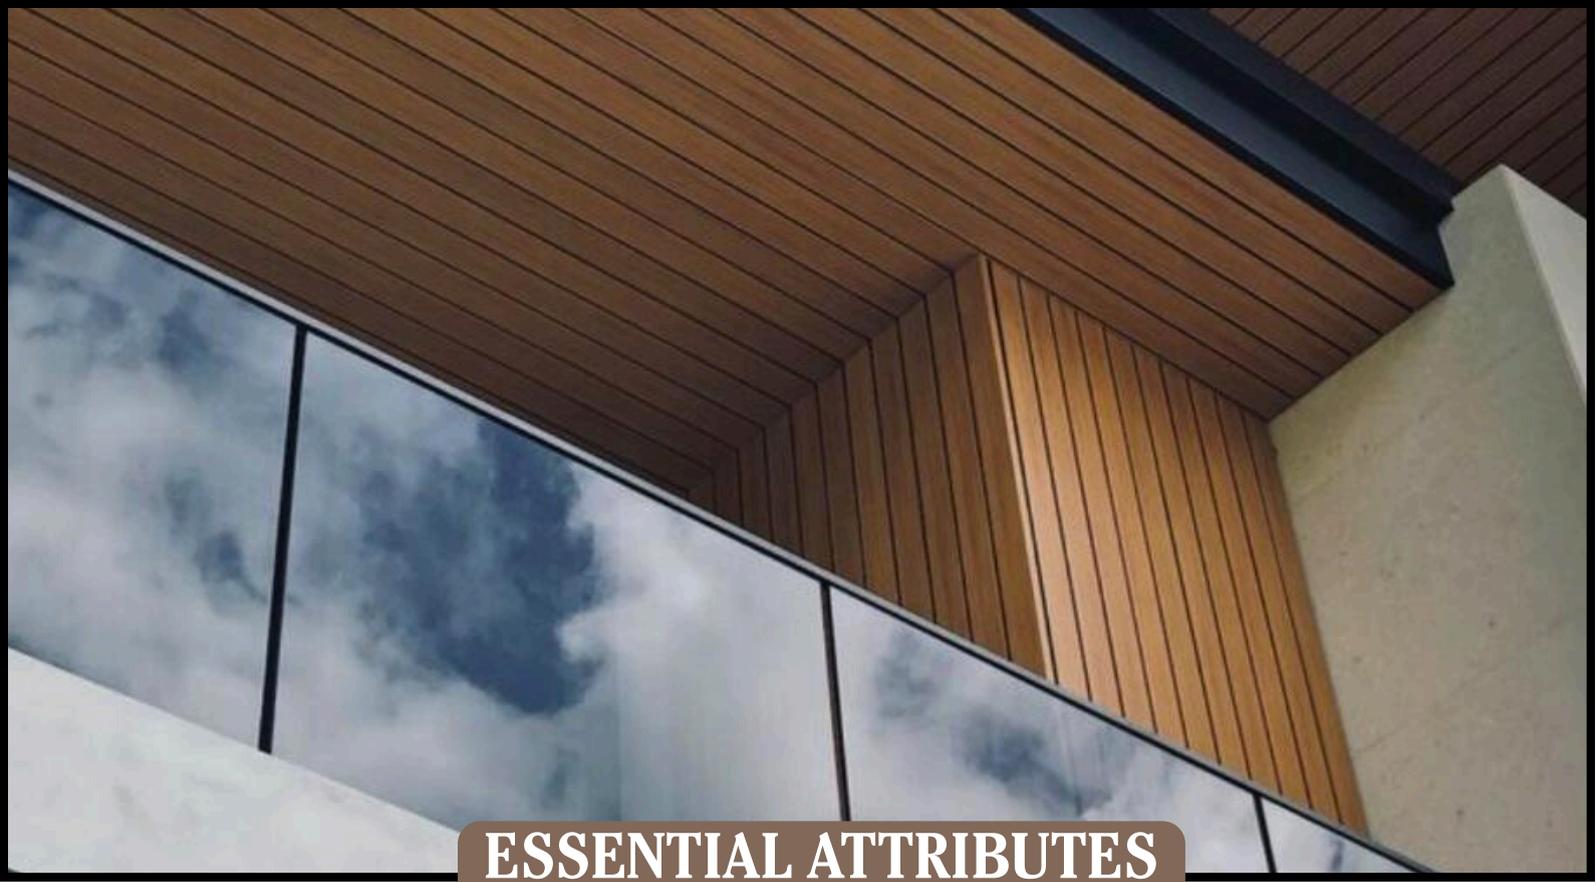

## ESSENTIAL ATTRIBUTES

### AESTHETICS

Fiberwood offers a distinctive appearance, combining a warm, natural feel with rich, intense colours and subtle multi-tone shades that closely resemble real wood. Its invisible fastening system enhances the natural, seamless look of the cladding.

### GUARANTEED COLOUR STABILITY

Thanks to advanced co-extrusion technology, the composite material is shielded by a durable polyethylene layer. This exclusive protective polymer formula ensures long-lasting colour stability, preventing discolouration and significantly reducing maintenance needs.

### DURABLE & STABLE

Completely rot-proof and 100% termite-resistant, with no moisture absorption. The polymer film covering all four sides of the cladding board provides enhanced protection and excellent impact resistance, ensuring long-term durability.

### ECO-FRIENDLY

Fiberwood is crafted from advanced polymer-wood technology. The outer layer is made from 100% engineered plastic, while the core contains 65% sawdust, 30% recycled polyethylene, and 5% compound. Free from toxic substances, adhesives, and heavy metals, these boards are manufactured using 95% recycled materials and are fully recyclable – making Fiberwood a sustainable, eco-conscious alternative to tropical wood.

# COLOR OPTIONS

## Fiberwood®

### French Cladding



Scratch Resistant



Impact Resistant



Heat Resistant



Corrosion Resistant



Stain Resistant



Anti Bacterial



Light Resistant



Abrasion Resistant



Easy Clean



All weather Resistant



### Brazilian Ipe

Inspired by the strength and beauty of natural Ipe, our Brazilian Ipe WPC Cladding adds a bold, luxurious finish to any surface.



### Royal Teak

For spaces that deserve warmth, character, and long-lasting beauty — Royal Teak WPC Cladding is your ideal choice.



### Charcoal Grey

Bring a touch of contemporary sophistication to your facades with Charcoal Grey WPC Cladding — a perfect blend of strength, style, and sustainability.



### Argentinian Grey

With its sleek grey finish and natural texture, Argentinian Grey WPC Cladding brings understated elegance to any exterior or interior.




# COMPONENTS

## Fiber Wood Composite Cladding



**DIMENSIONS**  
**2900\*126\*21MM**


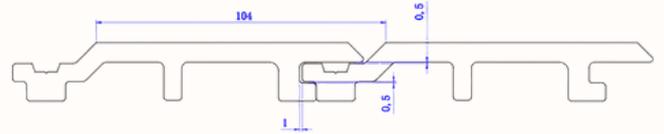


## Screws Options

Profil	Description	Dimensions
	Round head self-drilling and self-tapping screw	4.2 x 25 mm
	Round head self-drilling screw	

## JOIST INSTALLATION

Please consult a professional building professional to design and choose the correct drainage and ventilation duct materials and design layout. The thickness of the keel is at least 25MM, so that there is sufficient open and dry space between the wallboard and the wall not blocked by the ventilation ducts. The wall of the construction must be horizontal, and the center distance between the keels cannot exceed 500MM.

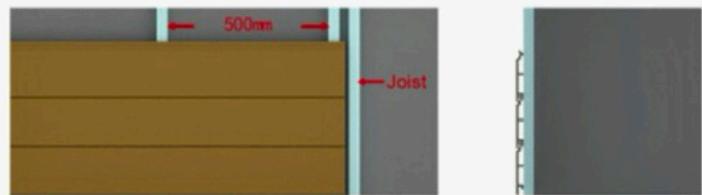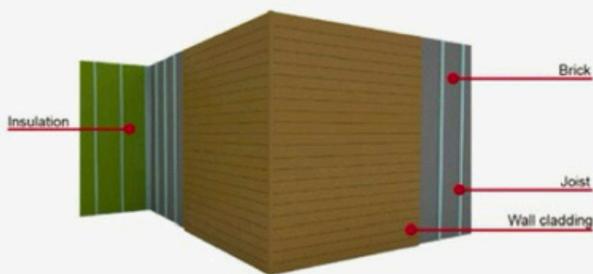


Horizontal Installation

## WALL CLADDING INSTALLATION



Vertical Installation

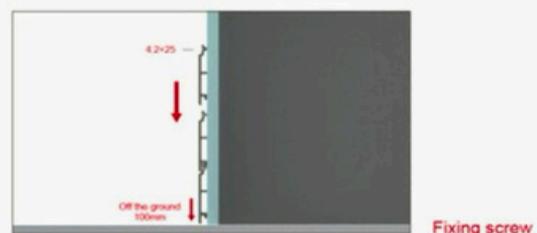

# ONKAR LAMINATES

C-33, Mansarovar Garden, New Delhi - 110015

Email : Info.laoptema@gmail.com

☎ 8920321797, 9891084763

🌐 [www.laoptema.com](http://www.laoptema.com)

**Fiberwood**<sup>®</sup>  
French Cladding

